




Features

- OSHA Compliant
- Chemical & UV Resistant
- Complete Systems
- Easily Installed in Minutes
- Retracts Easily for Access
- Custom Sizes
- Manufactured of aluminum and stainless steel with a highly visible synthetic netting.
- Custom sizes are manufactured in days at no additional cost.
- Full Five Year Warranty

Hatch Safe Fall Protection

The HatchSafe™ fall protection system is a lightweight net system that will greatly reduce the risk of a fall through. The system is designed to be installed in any type of floor or roof access hatch, for both new and existing applications. The system is compatible with all hatchway manufacturers.

The ParkUSA HatchSafe net system meets or exceeds all current OSHA standards and will greatly reduce the risk of injury or death from fall through accidents in hatchway installations. This protects you from costly law suits, time lost through accidents, and OSHA fines and citations. It can also lower workers compensation and liability costs.

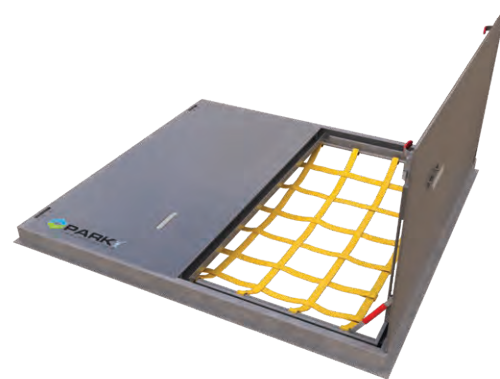

#BUILDING AMERICA!

CV | HATCHSAFE
Standard

Inspection

Safety nets should be inspected on a frequent basis. The inspection must cover damage, wear and deterioration. The safety net systems must also be inspected after any incident occurs that could affect the integrity of the net. If any net is found to be defective, it must not be used and must be removed from the safety net system.

Specifications

HatchSafe fall protection systems adhere to OSHA Drop Test Standards. The drop test involves a sandbag that weighs 400 pounds and is between 28 and 32 inches in diameter. The sandbag is dropped from the highest point from where a person could fall. The mesh size of the net cannot be larger than 6 by 6 inches. All of the mesh crossings must be secured so the mesh openings cannot widen more than 6 inches measured from center to center. Each net, or section of net, in a system has to have a perimeter border with a minimum breaking strength of 5,000 pounds. Between safety net panels, connections have to be just as strong as the net components themselves. Connections cannot be spaced more than 6 inches apart from each other.

Installation

HatchSafe fall protection systems can be installed on any standard aluminum or steel floor access, roof hatch or custom sized framed opening. The units are factory assembled and ready for installation.

How it Works

The Occupational Safety and Hazard Association (OSHA) sets standards for workplace safety. One of the OSHA standards states that workers who are exposed to possible vertical drops over six feet must have fall protection. One of the options for fall protection is a safety net system. OSHA has outlined specific guidelines for workplace safety net systems. The OSHA standard classification that covers safety nets is in section 1926.502(c) of the OSHA standards.

The ParkUSA HatchSafe net system meets or exceeds all current OSHA standards and will greatly reduce the risk of injury or death from fall through accidents in hatchway installations. This protects you from costly law suits, time lost through accidents, and OSHA fines and citations. It can also lower workers compensation and liability costs. The HatchSafe net system is a lightweight net system that will greatly reduce the risk of fall through. The system is designed to be installed in any type of floor or roof access hatch, or both new and existing units. The net does not restrict light or visibility needed for inspections, and the net easily slides open to facilitate access. Because 85% of normal procedures can be accomplished with the Hatch Net in place, one person can safely perform most inspections without the need for an additional worker or cumbersome fall protection equipment.

To request a quote or catalog, visit request.parkusa.com.

Additional Features

- Manufactured of aluminum and stainless steel with a highly visible synthetic netting.
- Stitched with PTFE Sewing Thread. This thread is manufactured from high strength expanded PTFE. It's not affected by UV (ultraviolet) radiation, acid rain, industrial pollutants or cleaning agents.
- All systems are shipped completely assembled including mounting hardware.
- Easily installed in virtually any floor or roof opening, new or existing application in minutes.
- Retracts easily for access to confined space or to pull pumps and equipment.
- Greatly improves employee safety while allowing freedom of movement and full visibility of area below net for inspections and sampling.
- Custom sizes are manufactured in days at no additional cost.
- Full five (5) year warranty on hardware and net.

Limitations

The HatchSafe net system, after installation, should be maintained in the closed position after each use. The HatchSafe is a fall protection system. At no time is the net to be used as a work platform, lifting mechanism, tool holder, tie off point or to attach any other equipment to it.

APPLICATIONS



Good to use
in BMPs



Municipal



Commercial



Industrial



Medical
Facilities