




ISOMETRIC

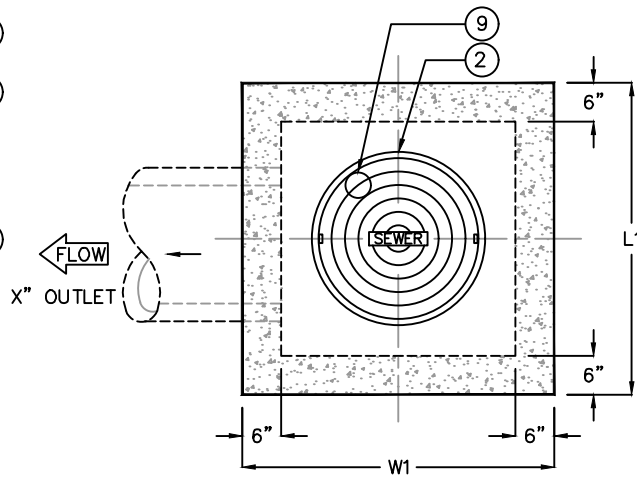


PLAN VIEW



NAME PLATE

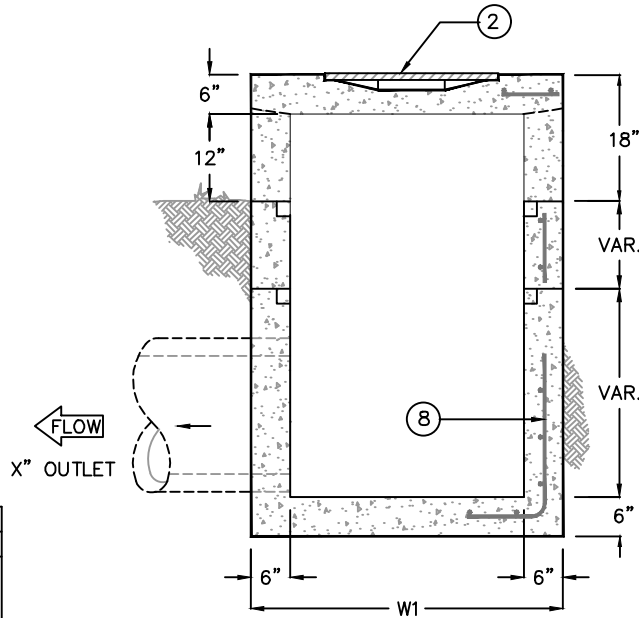

ELEVATION



| KEYED NOTES | | |
|-------------|-----|---|
| MARK | QTY | DESCRIPTION |
| 1 | 4 | OPENING ALL FOUR SIDES (VERTICAL REBAR GRATE IF REQUIRED) |
| 2 | 1 | 20" CAST-IN RING AND COVER |
| 3 | 1 | TOP SECTION |
| 4 | 1 | SAFETY BARS (OPTIONAL) |
| 5 | 1 | MID SECTION |
| 6 | 1 | BASIN SECTION |
| 7 | 2 | THINWALL KNOCKOUT PIPE OPENING "K" DIAMETER |
| 8 | - | REBAR AS REQUIRED |
| 9 | 1 | NAMEPLATE INDICATING: MFG: PARKUSA 888-611-PARK WWW.PARKUSA.COM MODEL: CBY-1 DATE MANUFACTURED |

| TYPE | L1 | W1 | K |
|--------|-------|-------|-----|
| CBY-36 | 4'-0" | 4'-0" | 32" |
| CBY-48 | 5'-0" | 5'-0" | 48" |
| CBY-60 | 6'-0" | 6'-0" | 60" |
| CBY-72 | 7'-0" | 7'-0" | 72" |

SPECIFICATIONS

CONCRETE: CLASS 1/II CONCRETE WITH OF DESIGN STRENGTH OF 4500 PSI AT 28 DAYS. UNIT IS OF MONOLITHIC CONSTRUCTION AT FLOOR AND FIRST STAGE OF WALL WITH SECTIONAL RISER TO REQUIRED DEPTH. RATED FOR H-20 LOADING.

REINFORCEMENT: GRADE 60 REINFORCED. NO. 4 STEEL REBAR TO CONFORM TO ASTM A615 ON REQUIRED CENTERS OR EQUAL.

C.I. CASTINGS: CAST IRON FRAMES AND GRATES ARE MANUFACTURED OF GREY CAST IRON CONFORMING TO ASTM A48-76 CLASS 30.



TYPE Y CURB INLET
MODEL CBY 36" THRU 72"

| | | | | | |
|------|------|-----|-----|----------|------|
| PM | PC | DRN | ENG | DWG. NO. | REV. |
| DATE | 2023 | | | CBY-1 | A |

PLOTTED ON 4/19/2024 3:33 PM BY Vu, Kate. C:\Users\vu\Desktop\Files replacement website\CBY-1

© ParkUSA. ALL RIGHTS RESERVED.