



PLAN VIEW

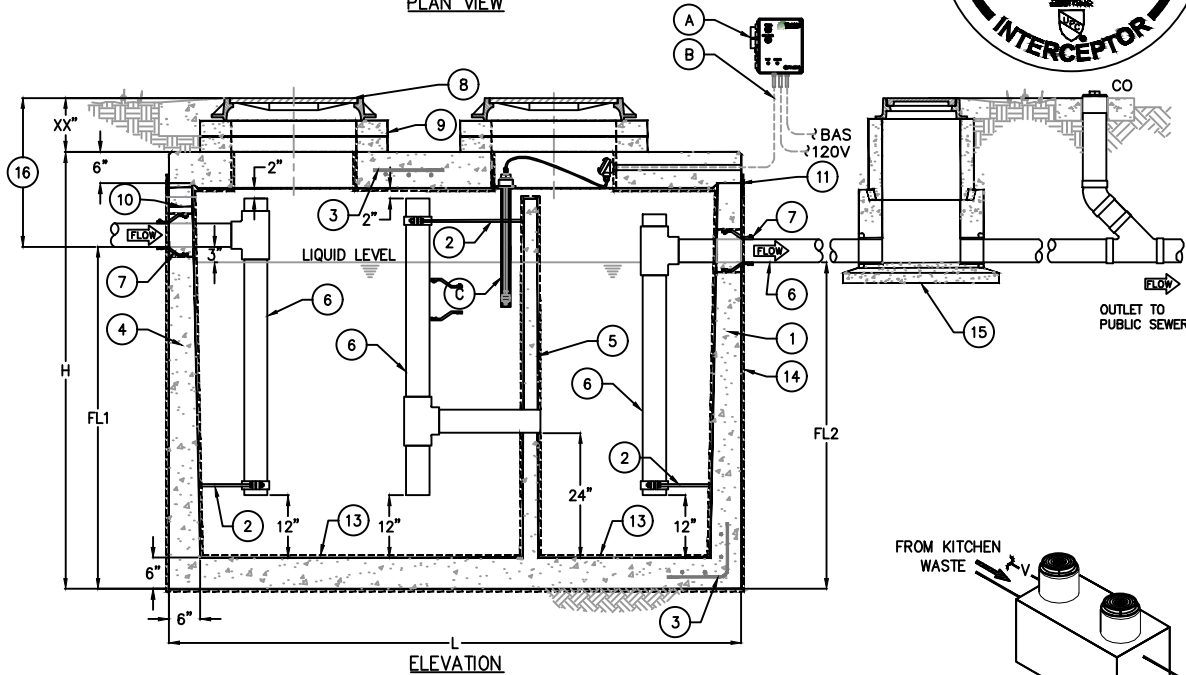

ELEVATION

| SERVICE ALERT SYSTEM NOTES |     |  |
|----------------------------|-----|--|
| MARK                       | QTY | DESCRIPTION  |
| A                          | 1   | SERVICE ALERT PANEL, NOTIFIES OF GREASE MAXIMUM CAPACITY w/ AUDIBLE & VISUAL ALARM (NEMA 4X) |
| B                          | -   | CABLE & CONDUIT ROUTED TO ALARM (BY OTHERS)  |
| C                          | 1   | GREASE SENSOR (NEMA 7)   |



| KEYED NOTES |     |  |
|-------------|-----|--|
| MARK        | QTY | DESCRIPTION  |
| 1           | 1   | PRECAST CONCRETE GREASE INTERCEPTOR  |
| 2           | 3   | GALVANIZED PIPE SUPPORT  |
| 3           | -   | REBAR AS REQ'D   |
| 4           | -   | TAPERED WALL   |
| 5           | 1   | MONOLITHIC BAFFLE  |
| 6           | 3   | SCH 40 PVC PIPING (4" OR 6")   |
| 7           | 2   | RESILIENT RUBBER CONNECTION  |
| 8           | 2   | 24" CAST IRON FRAME & COVER (GAS TIGHT)  |
| 9           | -   | CONCRETE EXTENSION RINGS AS REQ'D  |
| 10          | 1   | 4" VENT SLEEVE   |
| 11          | 1   | JOINT SEALED w/ PLASTIC FLEXIBLE GASKET & EXTERNAL WRAP  |
| 12          | 1   | NAMEPLATE INDICATING:<br>MFG: ParkUSA.com<br>888-611-PARK<br>MODEL: GT-CAOS<br>DATE MANUFACTURED |
| 13          | 1   | CHEMICAL-PROOF INTERIOR LINING 3mm HDPE  |
| 14          | 1   | BITUMASTIC VAPOR BARRIER ON EXTERIOR   |
| 15          | -   | SAMPLE WELL - PARKUSA SWB-24, 24"x4' DEEP<br>PRECAST CONTACT W/ 15" MANHOLE FRAME & COVER        |
| 16          | -   | MAXIMUM 6'-0" TOR TO FL  |

| GREASE INTERCEPTOR SCHEDULE |                |                   |                |          |         |          |           |            |
|-----------------------------|----------------|-------------------|----------------|----------|---------|----------|-----------|------------|
| MODEL NO.                   | CAPACITY USGal | GREASE CAP. (LBS) | EMPTY WT (LBS) | LENGTH L | WIDTH W | HEIGHT H | INLET FL1 | OUTLET FL2 |
| GT-500-CAOS                 | 500            | 1,200             | 7,000          | 7'-10"   | 4'-4"   | 4'-6"    | 3'-3"     | 3'-0"      |
| GT-750-CAOS                 | 750            | 1,700             | 10,000         | 7'-10"   | 4'-4"   | 6'-0"    | 4'-5"     | 4'-2"      |
| GT-1000-CAOS                | 1,000          | 2,300             | 13,200         | 8'-8"    | 5'-0"   | 6'-0"    | 4'-9"     | 4'-6"      |
| GT-1500-CAOS                | 1,500          | 3,500             | 18,000         | 9'-0"    | 6'-0"   | 7'-0"    | 5'-9"     | 5'-6"      |
| GT-2000-CAOS                | 2,000          | 4,600             | 19,000         | 9'-0"    | 6'-0"   | 8'-0"    | 6'-9"     | 6'-6"      |
| GT-2500-CAOS                | 2,500          | 5,700             | 27,000         | 13'-0"   | 7'-0"   | 7'-0"    | 5'-9"     | 5'-6"      |
| GT-3000-CAOS                | 3,000          | 6,900             | 30,000         | 13'-0"   | 7'-0"   | 8'-0"    | 6'-9"     | 6'-6"      |
| GT-3500-CAOS                | 3,500          | 8,000             | 38,500         | 13'-0"   | 7'-0"   | 8'-6"    | 7'-3"     | 7'-0"      |
| GT-4000-CAOS                | 4,000          | 9,240             | 38,100         | 16'-0"   | 8'-6"   | 7'-0"    | 5'-9"     | 5'-6"      |

OTHER SIZES ARE AVAILABLE. CONTACT US FOR MORE INFORMATION.

© ParkUSA. ALL RIGHTS RESERVED.

**General Information**

Typical applications include commercial and industrial food service kitchens where excessive grease may interfere with the proper drainage of the sewer system. The grease interceptor is generally buried below grade for gravity flow sewer systems. A sample well or cleanout is utilized on the outlet side for sampling by the local water authority.

**Specifications**

Concrete  
Design strength of 5000 PSI at 28 days. Unit is of monolithic construction at floor, first stage of wall and baffle with sectional riser to required depth. (Monolithic baffle required, slide-in type is not accept)

**Reinforcement**

Grade 60 reinforced with steel rebar conforming to ASTM A615 on required centers or equal.

**Manways**


Manhole frames, covers or grates are manufactured of grey cast iron conforming to ASTM A48-76 Class 30. Manhole shall be nominal 24 inch diameter and be traffic duty.

**Engineering Data**

The grease interceptor is structurally & hydraulically engineered to conform to UPC/IPC and regional plumbing codes. Consult with local authorities for specific application requirements.

Shop drawings shall include complete structural & buoyancy calculations certified by a licensed professional engineer upon request.

Consult with ParkUSA for exact excavation dimensions & shipping information.

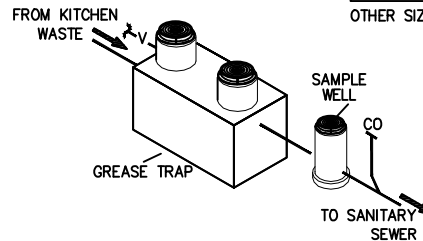

Uniform Plumbing Code Listed

MUNICIPALITIES:  
 • CITY OF OCEAN SIDE, CA • SAN MARCOS, CA  
 • VISTA, CA



GREASE INTERCEPTOR SERIES GT  
500 THRU 4000 GALLON CAPACITY

|      |      |     |               |      |
|------|------|-----|---------------|------|
| PC   | DRN  | ENG | DWG. NO.      | REV. |
|      |      |     | GT-01-CAOS-WA | A    |
| DATE | 4/24 |     |               |      |

LAST MODIFIED BY: KJU ON 4/25/2024 2:11 PM. LAST PLOTTED ON 4/25/2024 2:11 PM BY: VJ. KATE: FILE NAME: GT-01-CAOS-WA.DWG