

PARK StormTrooper® Interceptor The StormTrooper stormwater interceptor is designed to receive & treat stormwater runoff on a gravity-flow and once-through

Guaranteed Performance

Pre-engineered coalescing media packs are utilized for enhanced separation which provide SUPERIOR performance compared to other separators which utilize baffles or diverters.

Applications

The PARK StormTrooper® Interceptor is designed for stormwater runoff from commercial & industrial applications where excessive pollutants may harm the environment or damage sewer systems.

By-Pass Design

The unique design of the control basin allows for results an owner can clearly see. During a storm event, untreated stormwater enters the inlet compartment and is diverted to the interceptor for treatment. Clean stormwater can be witnessed in the effluent compartment after treatment.

Maintenance


StormTrooper has become known in the industry as the "Easiest to Maintain." Hatchway design makes inspection and vault entry accessible for maintenance. All compartments allow for the larger hose associated with Vactor Truck pump out. Maintenance instructions and loas are available from Park Engineering.


Call Us Contact Park Engineering for help sizing, SWQMPs and

performance information.

APPLICATIONS

- □ INDUSTRIAL □ COMMERCIAL
- □ RESIDENTIAL
- □ INSTITUTIONAL
- □ REDEVELOPMENT
- □ NPDES MUNICIPAL/INDUSTRIAL
- BMP STRUCTURAL SOLUTION



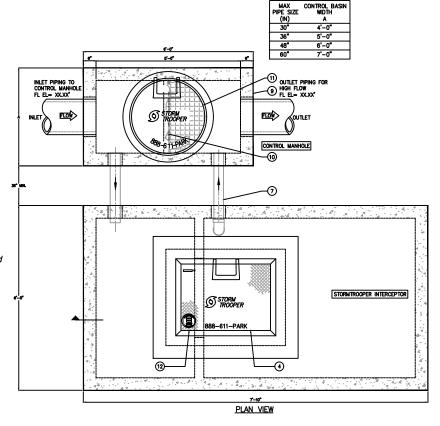

MARK QTY DESCRIPTION 1 1 PRECAST CONCRETE BOTTOM SECTION
2 1 PRECAST CONCRETE TOP 2 | PRECAST CONCRETE EXTENSION AS REO'D
4 | 1 | GALV STEEL ACCESS HATCHWAY
5 | 1 | ALL JOINTS TO BE SEALED W/ PLASTIC
FLEXIBLE GASKET
6 | 1 | SLUDGE BAFFLE 7 1 COALESCING MEDIA PACK 8 1 1 MANIFOLD PIPING 9 1 PRECAST CONCRETE CONTROL MANHOLE
10 1 CONTROL MANHOLE DEBRIS SCREEN
11 1 30° DIA CAST IRON RING & COVER
11 1 H20 TRAFFIC DUTY
NAMEPLATE INDICATING: NAMEPLATE INDICATING:
MFG: PORKUSA
888-611-PARK
WWW.PARKUSA.COM
MODEL: STORMITROOPER SWST-10
DATE MANUFACTURED 12 SERIAL # XXXXXX

SPECIFICATIONS

CONCRETE:

ACCESS:

CLASS 1/II CONCRETE WITH DESIGN STRENGTH OF 4500 PSI AT 28 DAYS. UNIT IS OF MONOLITHIC CONSTRUCTION AT FLOOR AND FIRST STAGE OF WALL WITH SECTIONAL RISER TO REQUIRED DEPTH.

GRADE 60 REINFORCED WITH STEEL REBAR CONFORMING TO ASTM A615 ON REQUIRED CENTERS OR EQUAL. REINFORCEMENT:

MANHOLE FRAMES, COVERS OR GRATES ARE

MANUFACTURED OF GREY CAST IRON CONFORMING TO ASTM A48-76 CLASS 30.

GALVANIZED STEEL SKID-RESISTANT STEEL COVER:

SINGLE LEAF H-20 LOADED.

ENGINEERING DATA

INTERCEPTOR IS STRUCTURALLY AND HYDRAULICALLY ENGINEERED CONFORMING TO REGULATORY STANDARDS. NOMINAL TOTAL LIQUID CAPACITY AND OIL HOLDING CAPACITY AS INDICATED.

STORMWATER INTERCEPTORS ARE UTILIZED TO REDUCE NON-POINT SOURCE POLLUTION ASSOCIATED WITH OIL AND SEDIMENT. THE INTERCEPTOR IS DESIGNED TO ALLOW FOR THE DETAINMENT OF SETTLABLE & FLOATABLE SOLIDS & LIQUIDS. THE INTERCEPTOR SHOULD BE INSPECTED ON A REGULAR BASIS TO DETERMINE PROPER OPERATION AND CLEANING.









SOLIDS OIL USGal

> 60 460

115

130 1,080

145 1,080

215 1,080

570

PERFORMANCE

| MODEL NO. | TOTAL CAPACITY USGal | TREATMENT | | |
|--------------|----------------------------|-----------|------|--|
| | | FLOWRATE | | |
| | | GPM | CFS | |
| SWST-10 | 1,000 | 650 | 1.45 | |
| SWST-15 | 1,500 | 875 | 1.95 | |
| SWST-20 | 2,000 | 1,125 | 2.51 | |
| SWST-25 | 2,500 | 1,375 | 3.06 | |
| SWST-30 | 3,000 | 1,600 | 3.56 | |
| SWST-35 | 3,500 | 1,775 | 3.95 | |
| | | | | |

| J | 0,000 | 1,000 | 0.00 | | 1,000 |
|----------|--------|-------|-------|-------|-------|
| SWST-35 | 3,500 | 1,775 | 3.95 | 390 | 1,080 |
| SWST-40 | 4,000 | 1,950 | 4.34 | 225 | 1,680 |
| SWST-45 | 4,500 | 2,150 | 4.79 | 475 | 1,175 |
| SWST-50 | 5,000 | 2,350 | 5.23 | 340 | 1,680 |
| SWST-60 | 6,000 | 2,675 | 5.96 | 450 | 1,680 |
| SWST-70 | 7,000 | 3,000 | 6.68 | 500 | 2,375 |
| SWST-80 | 8,000 | 3,325 | 7.41 | 635 | 2,375 |
| SWST-90 | 9,000 | 3,625 | 8.07 | 770 | 2,375 |
| SWST-100 | 10,000 | 3,900 | 8.69 | 910 | 2,375 |
| SWST-110 | 11,000 | 4,175 | 9.30 | 830 | 3,490 |
| SWST-120 | 12,000 | 4,425 | 9.86 | 970 | 3,490 |
| SWST-130 | 13,000 | 4,725 | 10.52 | 1,070 | 3,740 |
| SWST-140 | 14,000 | 4.950 | 11.02 | 1,200 | 3,740 |

SWST-150 15,000 5,200 11.58 1,335 3,740

OTHER SIZES & CONFIGURATIONS ARE AVAILABLE



@ ParkUSA. ALL RIGHTS RESERVED.



STORMWATER INTERCEPTOR STORMTROOPER MODEL SWST - 10-150

DRN ENG DWG. NO. PC DATE

2023

SWST-1

REV.

